

Wild horses roam free with grace and agility across vast plains. You'll find their indomitable spirit in the Bronco inkjet printer too. Saddle up for success with this hybrid inkjet printer offering breathtakingly beautiful print quality. Upgrade its horsepower for an even higher performance.



7000

1500

1000

700

400

200 2 153

> A beast for every need

Whatever environment you operate in, whatever your markets or applications, whether seeking high productivity, quality, or versatility, we have the right beast for you. Our inkjet printers are powerful by nature, each with unique strengths built into its design. These beasts will deliver impressive results without compromise, boosting your business.



Avinci CX3200 | roll-to-roll textile → →

Jeti Mira MG2716/2732 | flatbed → →

Oberon RTR3300 | roll-to-roll → →

Anapurna Ciervo H3200 | hybrid → →

Anapurna | hybrid printer series →

Anapurna RTR3200 | roll-to-roll →

> Why Agfa

Inkjet experts

We are a leading company in imaging technology and IT solutions with over 150 years of experience. We have been developing and manufacturing state-of-the-art inkjet printing systems for over two decades, empowering print service providers to become both more versatile and efficient.

Best cost of ownership

Inks, print heads, substrates, and color management software are perfectly tuned to each other to guarantee spot-on print quality, reliable production, low consumable usage and limited maintenance. In sum: we guarantee you the best possible cost of ownership.

One-stop shop

Opt for peace of mind with a complete solution from a single supplier: printer, software, inks, service and support. We even offer attractive financing options.

Spot-on inks

- > Large color gamut and high vibrancy
- > Low ink consumption thanks to Thin Ink Layer technology
- Reliable jetting & batch-to-batch consistency
- > Resistant to wear and tear
- > Highly opaque white
- > Primer option for difficult media
- > Compliant with health & environment standards, including GREENGUARD Gold



Asanti workflow & color management

- > Streamlines the printing process from prepress to production
- > Guarantees error-free job handling and consistent color reproduction
- > Parameter-based Calibrated Print Modes enable automatic job creation
- > Production Dashboard offers overview of job status, and ink and media consumption
- > Includes latest Adobe PDF Print Engine


More software options:

- > Asanti StoreFront cloud-based web-to-print solution
- > PrintSphere cloud-based file sharing
- > PrintTune print standardization

World-class training and support

- > Expert support worldwide minimizes downtime with fast response times and remote troubleshooting capabilities
- > Comprehensive training during setup and production, tailored to your needs
- > Your feedback shapes our partnership





Why the Bronco is the right beast for you

The Jeti Bronco H3300 wide-format hybrid printer is designed for sign shops and digital printers looking for a combination of versatility, productivity, and excellent print quality. With a 3.3-meter print width, UV LED curing, and a six-color plus white ink set, this print engine is a perfect fit for a wide range of indoor and outdoor print applications.


- > Versatile printer that tackles a wide range of rigid and roll media for indoor and outdoor applications
- > Productivity enhanced through efficient continuous board feeding & multiple board printing (up to 4 boards simultaneously)
- > Single-roll printing up to 3.3 meter wide independent dual-roll printing up to 1.6 meter wide
- > Borderless printing limits post-finishing requirements
- > Pre-white, sandwich white and post-white in one run
- > Built on an industrial framework tailored for enduring steady workloads
- > Printer technology and graphical user interface based on our Jeti Tauro high-end printing solutions
- > Perfect interaction between Asanti workflow software and the printer yields exceptional image quality
- > GREENGUARD Gold-certified inks with wide color gamut
- > Field-upgradeable from a two- to a four-row engine

A wide range of applications

The Jeti Bronco H3300 revolutionizes your business with unparalleled versatility across a spectrum of applications. This hybrid printer excels in producing high-quality prints on uncoated rigid media such as exhibition panels, stage graphics and advertising boards, as well as on roll media like film, vinyl, banners, canvas and coated textiles. UV LED lamps broaden the range of printable media to e.g. thin, heat-sensitive foils, as well as PET or microflute.



The printer's adaptability also extends to niche products and enables diverse creative expressions and applications in architectural and interior decoration. The white ink function lets you print on transparent materials for backlit applications or use white as a spot color.

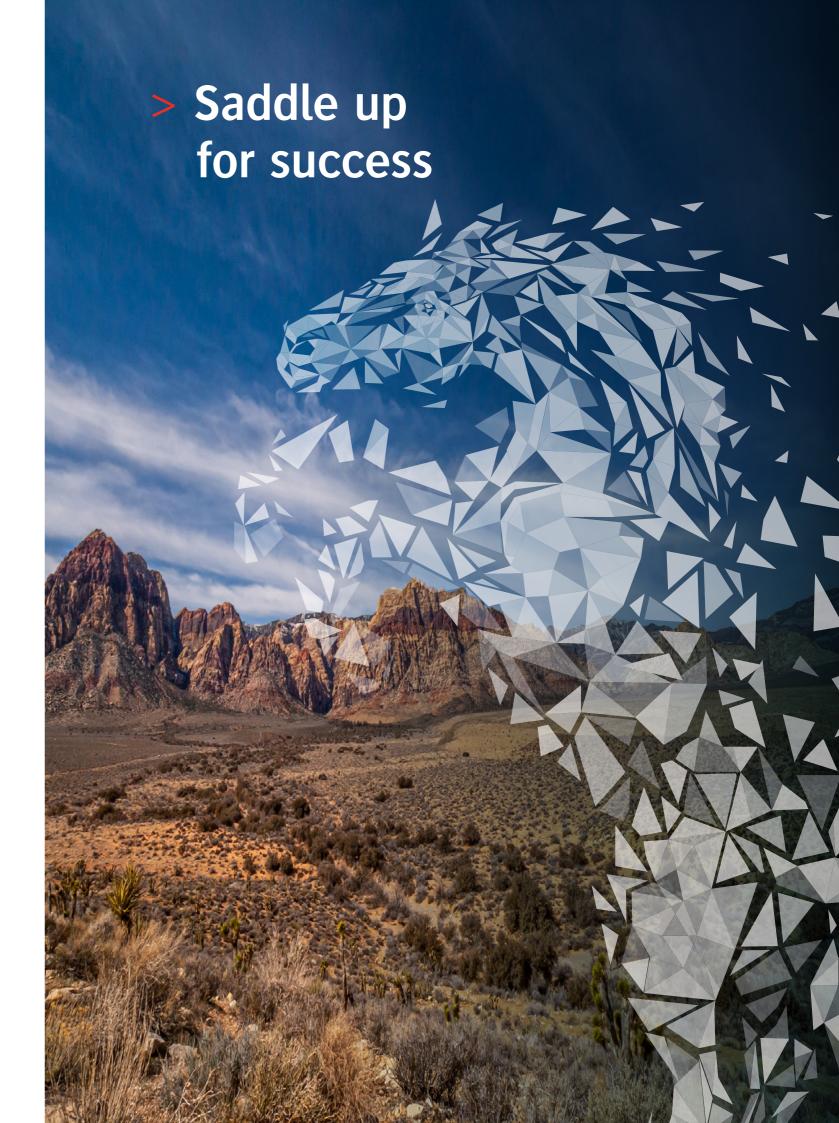



Roam free and venture into new territory



Single- or dual-roll printing


A single roll can be as wide as 3.3 meters, whereas in dual printing mode, each roll can be up to 1.6 meters wide. Switching between single- and dual-roll printing modes is straightforward, and the rolls can even have different diameters when printing in dual-roll mode.

Jeti Bronco H3300

> STANDOUT FEATURES



Powerful air-cooled UV LED lights offer substantial energy savings and are well-suited for heat-sensitive materials, thanks to their low energy output. This makes them ideal for printing thin slides self-adhesive sheets or stretched PVC materials



Shuttle beam with linear motor

A robust beam with a powerful and precise linear motor provides smooth and silent movement of the print shuttle, ensuring exceptional accuracy in dot placement and delivering outstanding image quality. As set of shuttle safety sensors prevents print heads from touching the substrate and getting damaged.



Smart Ink Management

Throughout production, the automatic ink management system diligently monitors ink levels. A separate system manages the white ink, overseeing circulation, under-pressure regulation, and cleaning. The white ink tank is also equipped with a stirring mechanism to maintain optimal ink consistency through continuous mixing.

The ink refill system is conveniently accessible, allowing for clean and straightforward refilling of the ink containers. RFID tags on the ink bottles ensure accurate and hassle-free refilling of ink containers, even during printing.

Ionizer

An ionization bar mounted on the carriage removes electrostatic charges on the substrate, ensuring optimum ink droplet placement.

Small and large media tables

The Jeti Bronco H3300 comes standard with an additional set of large media tables that can be coupled to the default smaller tables. This makes it possible to print on rigid materials up to a length of 3.2 m.

Protective closure

The safety hood covers the print belt and shuttle, eliminating any potential risks of harm to operators.



Multiple board — and borderless printing

The continuous board feeding capacity drastically enhances efficiency and productivity when printing rigid materials. While one board is printing, the next one can already be loaded. This automated process is ideal for volume printing of boards, enabling the simultaneous printing of up to four boards. With the added advantage of borderless printing, post-finishing becomes



User-friendly control panel

The printer features an intuitive graphical user interface accessible via a touch screen mounted on a swivel arm, with all settings organized for ease of use. It manages print files efficiently through an internal bitmap server, ensuring fast spooling and secure data transfer. Agfa has standardized this interface across all high-end UV printing systems, making it easy for users to transition between Agfa printers on the shop floor.



Flawless media handling

The printer guarantees precise media loading with automated functionalities embedded in the GUI, such as the **media registration** bar and head height adjustment.

A **vacuum system** intelligently controlled across four zones maintains consistent vacuum levels throughout the printing process, whether printing on flexible or rigid materials.

In addition, the printer is equipped with **inflatable airshafts** for unwinding and rewinding, complemented by a rewinding tension roller, ensuring excellent material tension and wrinkle-free prints. The carbon-made rear shaft is both lightweight for operator comfort and robust for efficient performance.



Pedal controlled

The start of the printing, the vacuum of the belt and the movement of the belt can all be controlled by easy-to-use pedals.

> Upgrade your horsepower

Specifications Jeti Bronco H3300

(1,615 ft²/h) (807 - 1076 ft²/h) (152 - 646 ft²/h) (269 ft²/h) with borderless printing rigid roller table: 192 cm (75.6 in) rigid roller table + media extension table (default): 320 cm (126 in) 60 x 42 cm - 23.6 x 16.5") ness: 0.2 mm (0.008") kness: 50 mm (1.97") rinting table (22 lb)
rigid roller table: 192 cm (75.6 in) rigid roller table + media extension table (default): 320 cm (126 in) $60 \times 42 \text{ cm} - 23.6 \times 16.5\text{"}$) ness: 0.2 mm (0.008") (ness: 50 mm (1.97")
rigid roller table: $192\ cm\ (75.6\ in)$ rigid roller table + media extension table (default): $320\ cm\ (126\ in)$ $60\ x\ 42\ cm\ -\ 23.6\ x\ 16.5")$ ness: $0.2\ mm\ (0.008")$ (ness: $50\ mm\ (1.97")$
rigid roller table: $192\ cm\ (75.6\ in)$ rigid roller table + media extension table (default): $320\ cm\ (126\ in)$ $60\ x\ 42\ cm\ -\ 23.6\ x\ 16.5")$ ness: $0.2\ mm\ (0.008")$ (ness: $50\ mm\ (1.97")$
rigid roller table + media extension table (default): 320 cm (126 in) 60 x 42 cm - 23.6 x 16.5") ness: 0.2 mm (0.008") (ness: 50 mm (1.97")
ness: 0.2 mm (0.008") kness: 50 mm (1.97")
xness: 50 mm (1.97")
inting table (22 lb)
with borderless printing
d by weight and diameter
.08")
lb) per cm (0.4" in roll width, meaning 160 kg (353 lb) evenly distributed over the full 3.3 m (130") width
core media rolls – maximum media roll diameter 35 cm (13.8")
ite
00 dpi
nt / Negative: 6 point
4 cm (79 x 282 x 84")
14 (b)
star connection with Neutral wire (3 x 32 A) 50/60Hz
delta connection without Neutral wire (3 x 32 A) 50/60 Hz
delta connection without Neutral wire (3 x 32 A) 50/60 Hz. according to ISO 8573-1 2010), 160 l/min compressor with 50 l barrel @6bar

> Get a demo or print sample pack!

